



<b>Type:</b>	<b>TPC</b>
<b>eDMX</b>	≤ 512 (DMX via eDMX Nodes)
<b>Total</b>	≤ <b>512 channels</b>
<b>Type:</b>	<b>VLC</b> (___=50,100,250,500,1000,1500) (e.g. <b>VLC+ 100</b> )
<b>eDMX</b>	≤ ___*512 (e.g. 51,200 channels) (DMX via eDMX Nodes)
<b>Total</b>	≤ ___*512 (e.g. <b>51,200 channels</b> )

**Note:** The VLC channels are used to control a single composition of fixtures. The DVI-D input is local to the VLC channels. The TPC can control its channels with complete freedom. The VLC and TPC can be programmed and triggered in the same project.

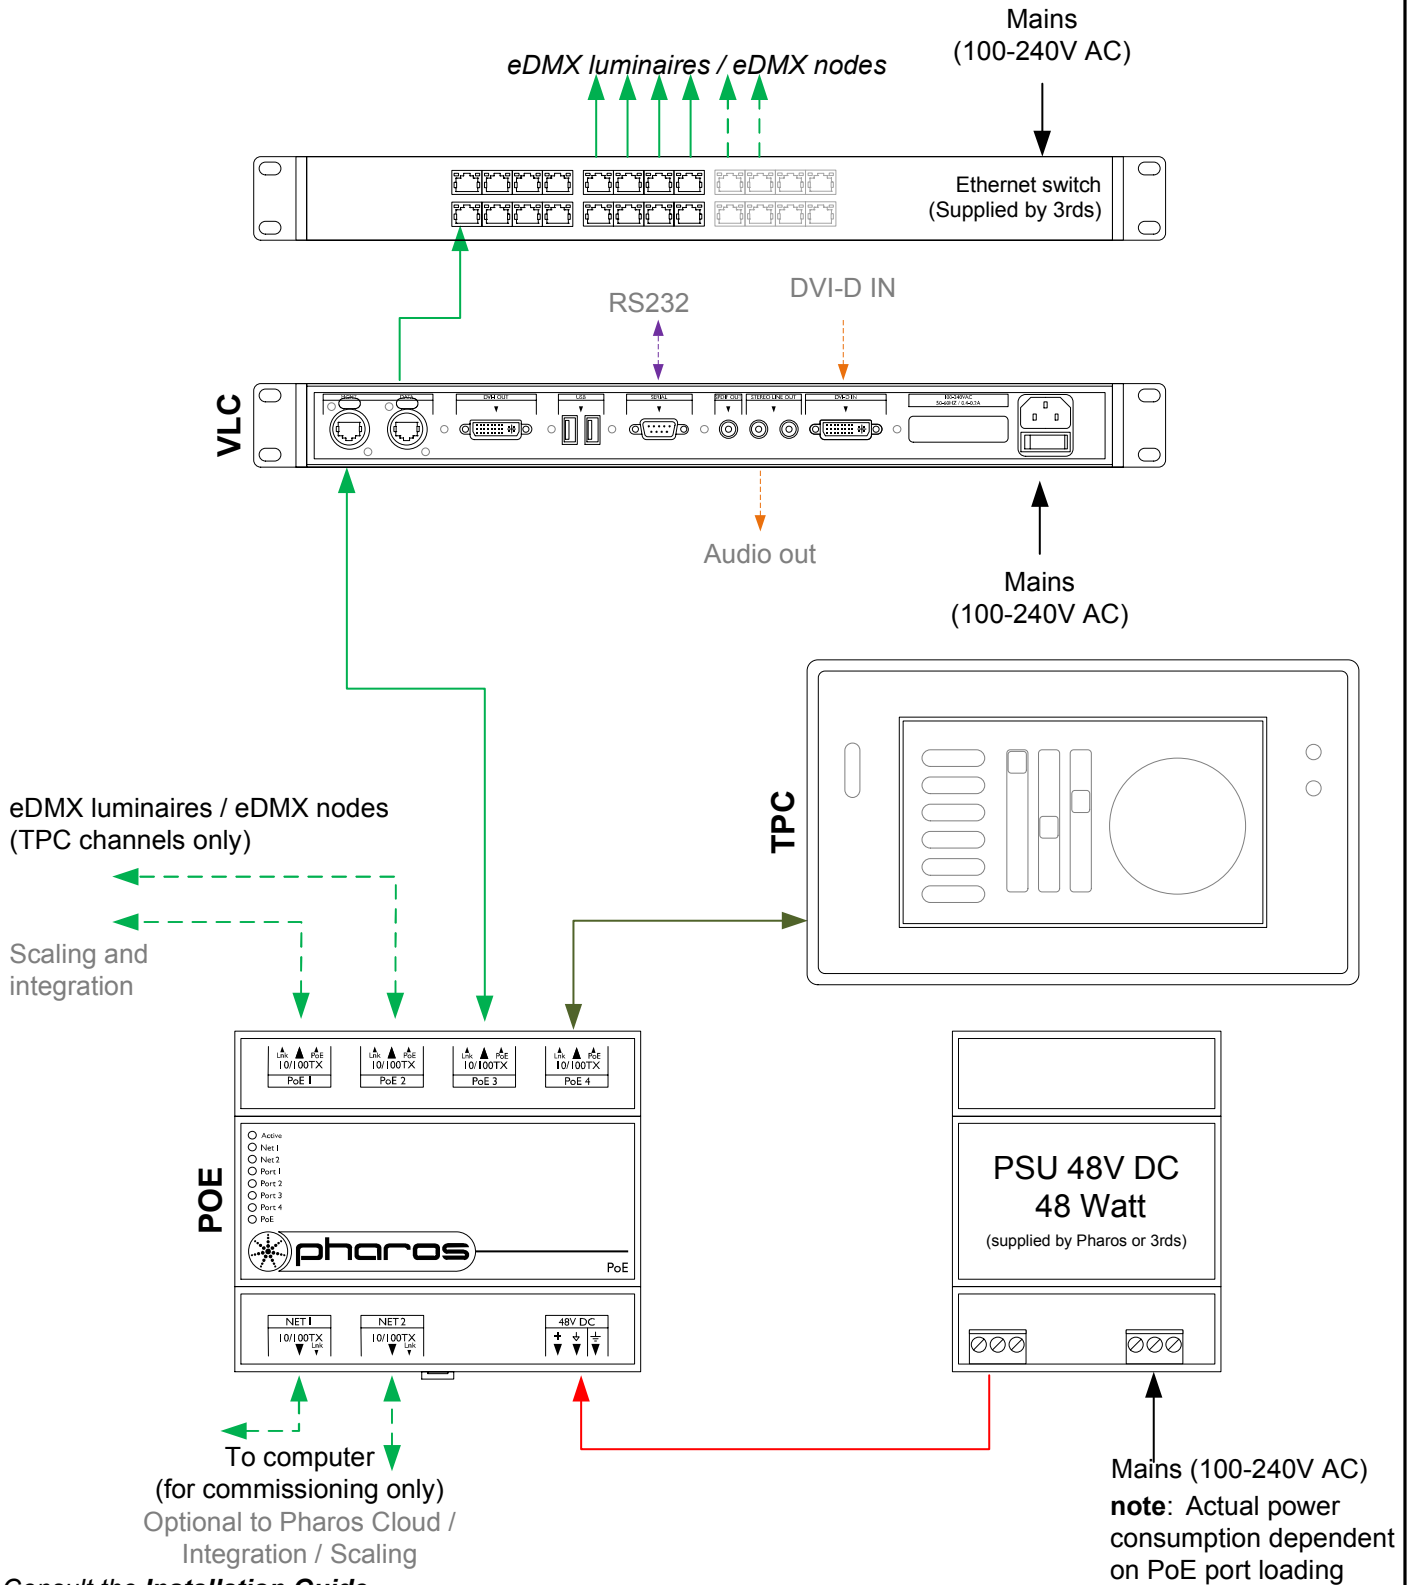

- Consult the **Installation Guide** for technical details
- See **General Notes.pdf** for information on cabling types
- **More configurations** are possible to fulfil any project
- Contact your supplier or visit our website for support

 pharoscontrols.com	Reference: 2104	Name: TPC & VLC (dual network)	
	Size: A4	Date: 17/09/2018	Rev: V1.0
	Page:	Notes: Setup Minor adjustments	